


TYPE 1588

RADIO-FREQUENCY CHOKES

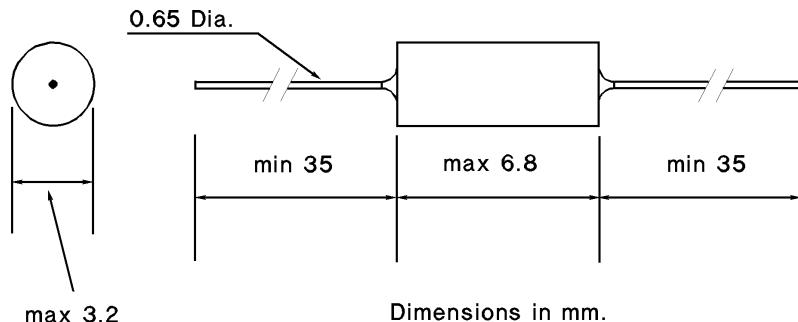

Core Thermoset Plastic up to 1.0 μ H

Low-loss Ferrite above 1.0 μ H

Coating Polyurethane Lacquer

Load on Terminals 2Kg max

Working Temperature -55 to +85°C ambient

Marking Type and inductance

Inductance μ H ($\pm 10\%$)	Q		@	Fr MHz	Rdc Ω	Idc A
	Typ	F MHz	Typ	Typ	Max	
0.1	50	25	680	0.1	1.3	
0.15	50	25	600	0.13	1.1	
0.22	50	25	510	0.16	1.0	
0.33	50	25	410	0.18	0.9	
0.47	50	25	330	0.28	0.8	
0.68	50	25	280	0.3	0.75	
1.0	50	25	250	0.42	0.65	
1.5	70	8.0	150	0.25	0.8	
2.2	70	8.0	125	0.3	0.75	
3.3	60	8.0	100	0.35	0.7	
4.7	65	8.0	85	0.5	0.6	
6.8	70	8.0	70	1.1	0.4	
10	70	8.0	60	1.8	0.3	
15	60	2.5	45	2.6	0.25	
22	50	2.5	35	5	0.18	
33	60	2.5	25	6.2	0.16	
47	65	2.5	21	7.5	0.15	
68	70	2.5	17	8.5	0.14	
100	70	2.5	13	11.5	0.12	

Idc max: Maximum Current at 85°C ambient


For other temperatures use the "Load Ratings" curve 2 on page 17

To order these chokes please specify type 1588 and the inductance value.

INDUCTORS AND TRANSFORMERS

from FERROPERM UK Ltd.

LOAD RATINGS for CHOKES

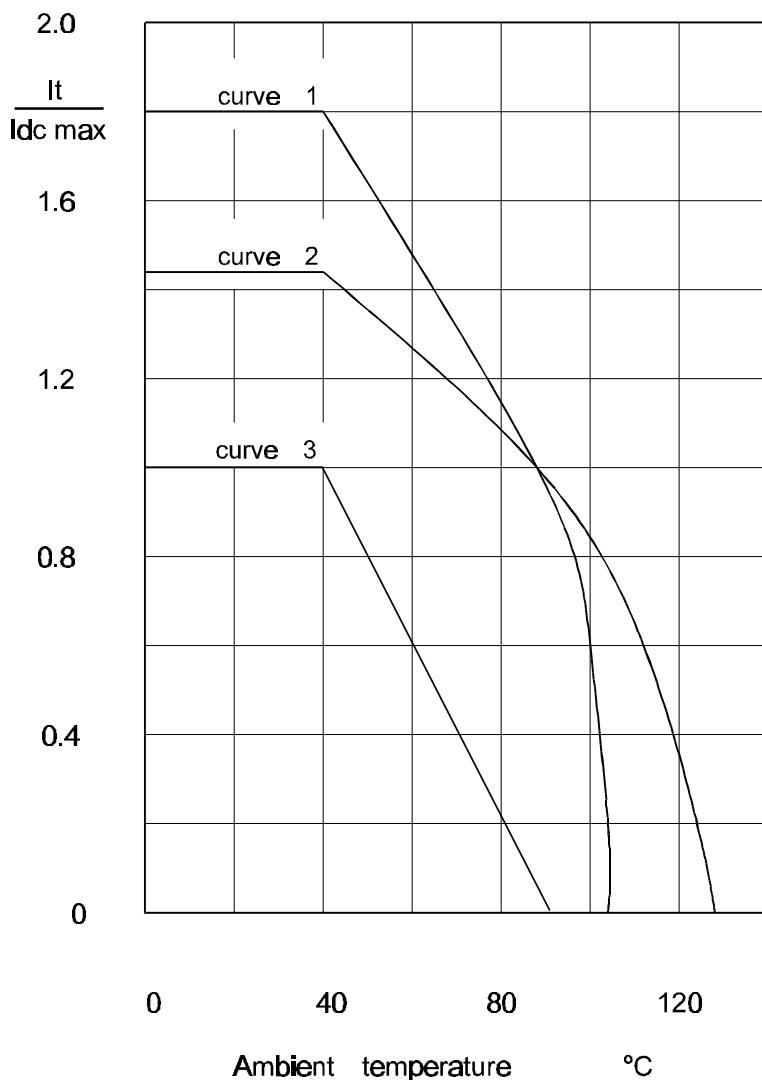

I_t = Maximum current at ambient temperature

I_{dc max} = Maximum current shown on data sheet.

Whilst every care was taken to avoid any mistakes in the compilation of this catalogue, no responsibility can be assumed for any errors which may have occurred in it.

In line with Ferroperm's policy of continual development, Ferroperm reserves the right to alter specifications of any products without notice.