


Single line power toroidal inductor - vertical mount

1601-X-X

Single line chokes for suppression in mains supply lines, switching regulators, power supplies, SCRs and Triac controls and filters.

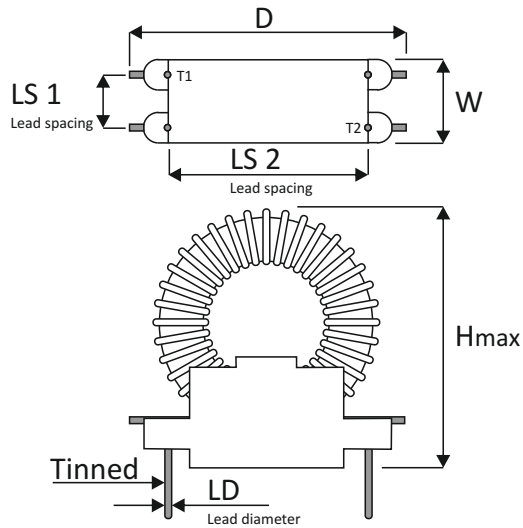

Type number	L 1kHz uH+-10%	I _{max} A	R _{dc} max Ohm	D mm	W mm	H _{max} mm	LS 1 mm	LS 2 mm	LD mm
1601-5-5	5	5	0,013	30	15	15,4	10,2	20,3	1,3
1601-5-7	5	7	0,012			19,8			
1601-5-13	5	13	0,008			27,4			
1601-10-5	10	5	0,020			15,4			
1601-10-7	10	7	0,015			19,8			
1601-10-13	10	13	0,014			27,4			
1601-25-4	25	4	0,035			19,8			
1601-25-10	25	10	0,014			27,4			
1601-50-4	50	4	0,025			21,8			
1601-50-7	50	7	0,038			28,0			
1601-100-4	100	4	0,080			27,4			
1601-100-5	100	5	0,050			30,0			
1601-250-4	250	4	0,130	33	20	32,5	15,2	22,9	
1601-250-9	250	9	0,550			47,8			
1601-500-3	500	3	0,220			38,9			
1601-500-5	500	5	0,160			46,5			
1601-1000-2	1000	2	0,620			37,6			

Temperature range -55 to +85 deg C.

Ferroperm-EMC