


# PI-filter

32824003S

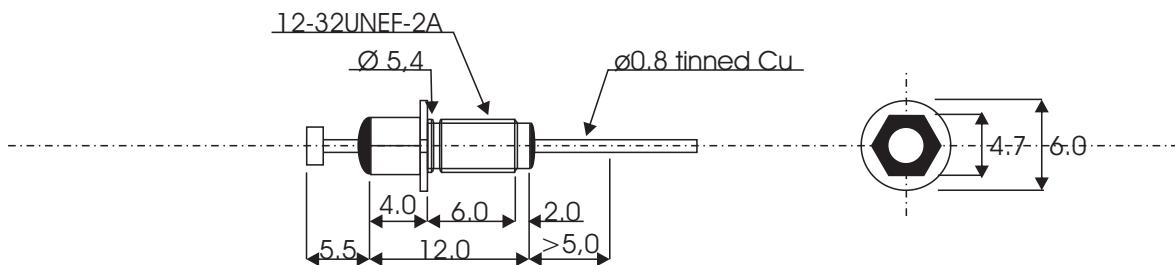

Working voltage

250Vdc.

Test voltage

1000Vdc 1min.

Feed-through current

max 10A

Insulation resistance

min  $10^4$ MOhm.

IEC category

55/125/56

Capacitance

1600pF -0/+80%

Inductance

1000nH-50/+100%

Soldering conditions

max 250 deg C

Marking

None.

Ceramic

X7R

Attenuation (typical values)

1MHz 2dB

10MHz 25dB

100MHz 65dB

1000MHz 80dB