


# PI-filter

32824005D

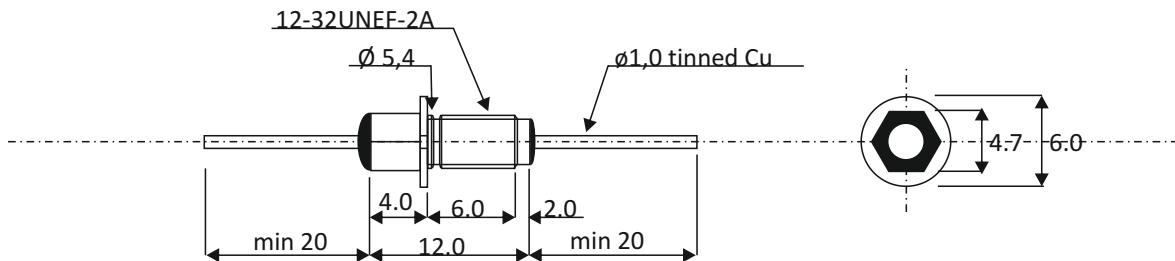

Working voltage.....	250Vdc.
Test voltage.....	1000Vdc 1min.
Feed-through current.....	max 15A
Insulation resistance.....	min 10000 MOhm.
IEC category.....	55/125/56
Capacitance .....	1600pF -0/+80%
Inductance.....	1000nH-50/-+100%
Soldering conditions.....	max 250 °C
Marking.....	None.
Ceramic.....	X7R
Atenuation (typical values).....	
1MHz	2dB
10MHz	25dB
100MHz	65dB
1000MHz	80dB