


Feed-through Capacitor

33814024D

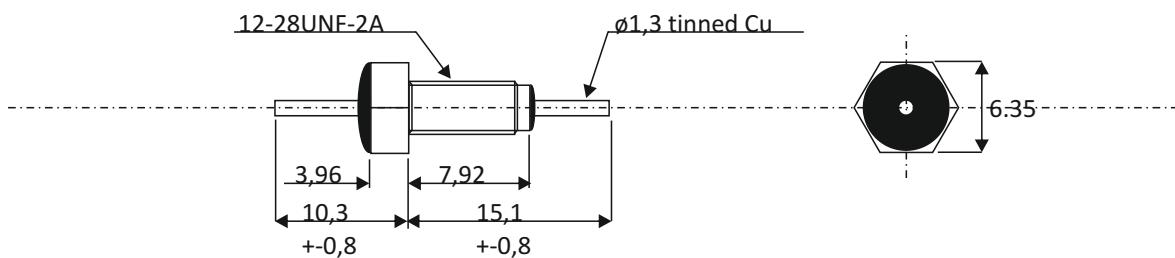

Working voltage	500Vdc.										
Test voltage	1000Vdc 1min.										
Feed-through current	max 25A										
Insulation resistance	min 10000 MOhm.										
IEC category	55/125/56										
Capacitance (total)	1,0nF-20/+80%										
Soldering conditions	max 250deg C										
Marking	None.										
Atenuation (typical values)	<table><tr><td>1MHz</td><td>1 dB</td></tr><tr><td>10MHz</td><td>9 dB</td></tr><tr><td>100MHz</td><td>28 dB</td></tr><tr><td>1000MHz</td><td>42 dB</td></tr><tr><td>10000MHz</td><td>42 dB</td></tr></table>	1MHz	1 dB	10MHz	9 dB	100MHz	28 dB	1000MHz	42 dB	10000MHz	42 dB
1MHz	1 dB										
10MHz	9 dB										
100MHz	28 dB										
1000MHz	42 dB										
10000MHz	42 dB										