


Feed-through capacitor

33814030D/31D/32D/33D/34D/35D/36D/37D

Bushing mount sealed feed through capacitor M2,5x0,45.

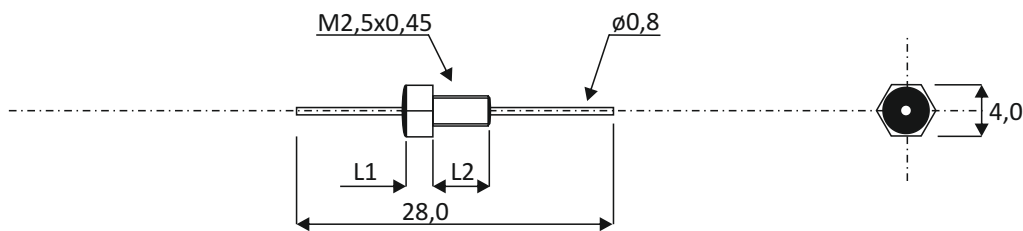

Working voltage

Test voltage

Feed-through current

Insulation resistance

IEC category

Capacitance

Marking

Soldering on leads

See below.

2,5 x working voltage 1min.

See below

min 10000 MOhm.

55/125/56

See below

None

Max 270 deg C.

Type number	L1 mm	L2 mm	CAP pF	TOL % or GMV	Vdc	I A	Minimum insertion loss dB			
							1 Mhz	10 Mhz	100 Mhz	1 Ghz
33814030D	2,5	4,0	100	-20/+80	100	10	-	-	3	20
33814031D	2,5	4,0	200	-20/+80	100	10	-	-	6	23
33814032D	2,5	4,0	500	-20/+80	100	10	-	-	15	35
33814033D	2,5	4,0	1000	-20/+80	100	10	-	5	20	38
33814034D	2,5	4,0	2000	GMV	100	10	-	8	23	41
33814035D	2,5	4,0	5000	GMV	100	10	-	15	30	45
33814036D	2,5	4,0	10000	GMV	100	10	3	21	35	50
33814037D	2,5	4,0	20000	GMV	100	10	7	25	37	50

Other capacitances or wires are available upon request.