


Feed-through capacitor

33814070D/71D/72D/73D/74D/75D/76D/77D/78D

Bushing mount sealed feed through capacitor M5,0x0,8.

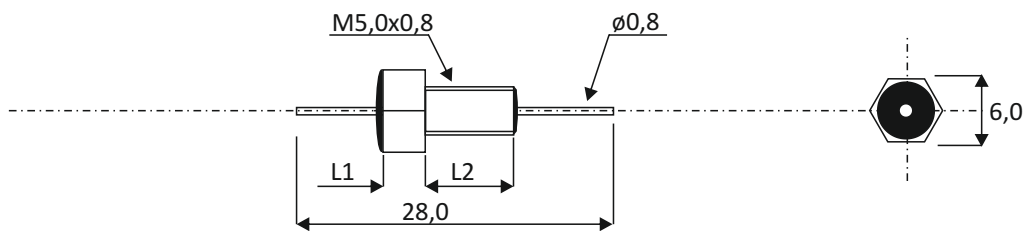

Working voltage

Test voltage

Feed-through current

Insulation resistance

IEC category

Capacitance

Marking

Soldering on leads

See below.

2,5 x working voltage 1min.

See below

min 10000 MOhm.

55/125/56

See below

None

Max 270 deg C.

Type number	L1 mm	L2 mm	CAP pF	TOL % or GMV	Vdc	I A	Minimum insertion loss dB			
							1 Mhz	10 Mhz	100 Mhz	1 Ghz
33814070D	4,0	8,0	100	-20/+80	100	10	-	-	3	20
33814071D	4,0	8,0	200	-20/+80	100	10	-	-	6	23
33814072D	4,0	8,0	500	-20/+80	100	10	-	-	15	35
33814073D	4,0	8,0	1000	-20/+80	100	10	-	5	20	38
33814074D	4,0	8,0	2000	GMV	100	10	-	8	23	41
33814075D	4,0	8,0	5000	GMV	100	10	-	15	30	45
33814076D	4,0	8,0	10000	GMV	100	10	3	21	35	50
33814077D	4,0	8,0	20000	GMV	100	10	7	25	37	50
33814078D	4,0	8,0	50000	GMV	100	10	13	32	42	50

Other capacitances or wires are available upon request.