


Feed-through capacitor

33814080D/81D/82D/83D/84D/85D/86D/87D/88D/89D

Bushing mount sealed feed through capacitor M6,0x0,75.

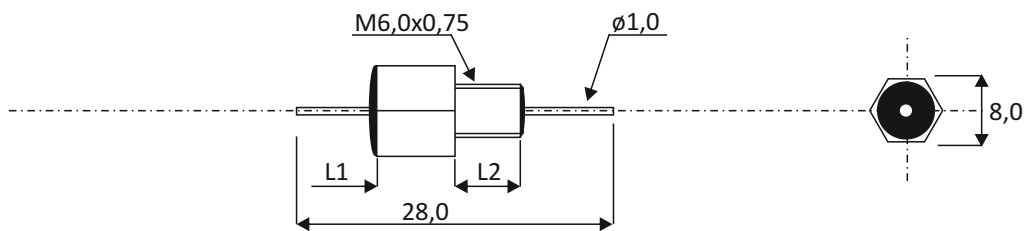

Working voltage

See below.

Test voltage

2,5 x working voltage 1min.

Feed-through current

See below

Insulation resistance

min 10000 MOhm.

IEC category

55/125/56

Capacitance

See below

Marking

None

Soldering on leads

Max 270 deg C.

Type number	L1 mm	L2 mm	CAP pF	TOL % or GMV	Vdc	I A	Minimum insertion loss dB			
							1 Mhz	10 Mhz	100 Mhz	1 Ghz
33814080D	7,4	5,1	100	-20/+80	100	15	-	-	3	20
33814081D	7,4	5,1	200	-20/+80	100	15	-	-	6	23
33814082D	7,4	5,1	500	-20/+80	100	15	-	-	15	35
33814083D	7,4	5,1	1000	-20/+80	100	15	-	5	20	38
33814084D	7,4	5,1	2000	GMV	100	15	-	8	23	41
33814085D	7,4	5,1	5000	GMV	100	15	-	15	30	45
33814086D	7,4	5,1	10000	GMV	100	15	3	21	35	50
33814087D	7,4	5,1	20000	GMV	100	15	7	25	37	50
33814088D	7,4	5,1	50000	GMV	100	15	13	32	42	50
33814089D	7,4	5,1	100000	GMV	100	15	19	39	50	50

Other capacitances or wires are available upon request.