


Feed-through capacitor

33814090D/91D/92D/93D/94D/95D/96D/97D/98D/99D

Bushing mount sealed feed through capacitor M8,0x1,25.

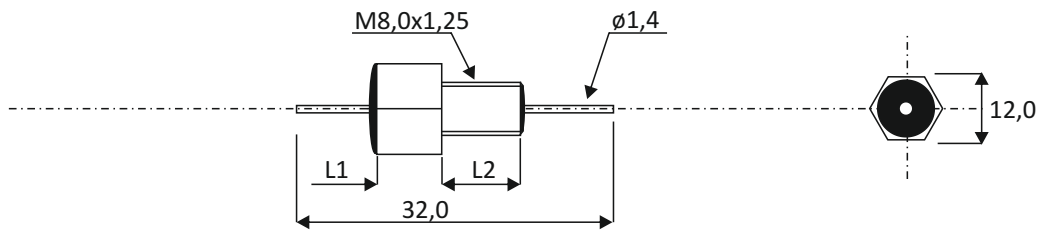

Working voltage

See below.

Test voltage

2,5 x working voltage 1min.

Feed-through current

See below

Insulation resistance

min 10000 MOhm.

IEC category

55/125/56

Capacitance

See below

Marking

None

Soldering on leads

Max 270 deg C.

Type number	L1 mm	L2 mm	CAP pF	TOL % or GMV	Vdc	I A	Minimum insertion loss dB			
							1 Mhz	10 Mhz	100 Mhz	1 Ghz
33814090D	8,0	10,0	100	-20/+80	100	25	-	-	3	20
33814091D	8,0	10,0	200	-20/+80	100	25	-	-	6	23
33814092D	8,0	10,0	500	-20/+80	100	25	-	-	15	35
33814093D	8,0	10,0	1000	-20/+80	100	25	-	5	20	38
33814094D	8,0	10,0	2000	GMV	100	25	-	8	23	41
33814095D	8,0	10,0	5000	GMV	100	25	-	15	30	45
33814096D	8,0	10,0	10000	GMV	100	25	3	21	35	50
33814097D	8,0	10,0	20000	GMV	100	25	7	25	37	50
33814098D	8,0	10,0	50000	GMV	100	25	13	32	42	50
33814099D	8,0	10,0	100000	GMV	100	25	19	39	50	50

Other capacitances or wires are available upon request.