


PI-filter

33822002S

Corresponding to F.C. Spec. 91240/2

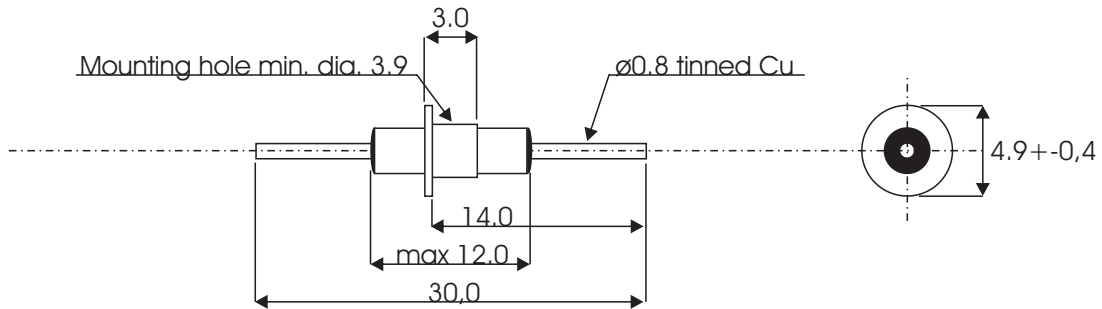

| | |
|-----------------------------------|---------------------------|
| Working voltage..... | 250Vdc. |
| Test voltage..... | 750Vdc 1min. |
| Feed-through current..... | max 10A |
| Insulation resistance..... | min 10 ⁴ MOhm. |
| IEC category..... | 55/085/56 |
| Capacitance (total)..... | 3nF-0/+100% |
| Inductance..... | 1000nH-50/+100% |
| Soldering conditions..... | max 250°C |
| Marking..... | None. |
| Attenuation (typical values)..... | 10 MHz 12dB |
| | 100 MHz 65dB |
| | 1 GHz 75dB |
| | 10 Ghz 75dB |