


PI-filter

33822003S

Corresponding to F.C. Spec. 95605
This filter is high temperature soldered.

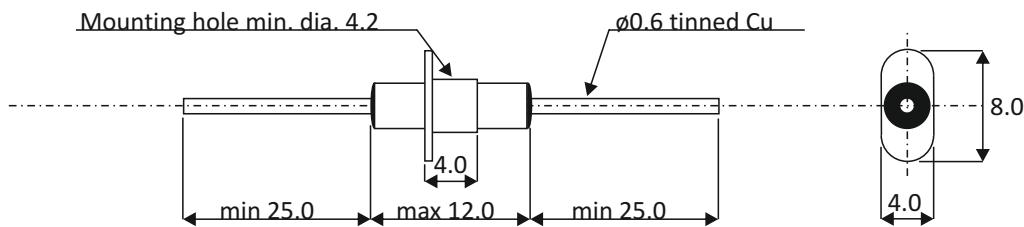

Working voltage	250Vdc.
Test voltage	750Vdc 1min.
Feed-through current	max 5A
Insulation resistance	min 10 Ω Mohm.
IEC category	55/085/56
Capacitance	min. 2 x 1.5nF
Inductance	1000nH-50/+100%
Soldering conditions	max 250 $^{\circ}$ C
Marking	None.
Atenuation (typical values).....1MHz	2dB
10MHz	25dB
100MHz	65dB
1000MHz	80dB