


PI-filter for EX applications according to EN 50 020

33824001S

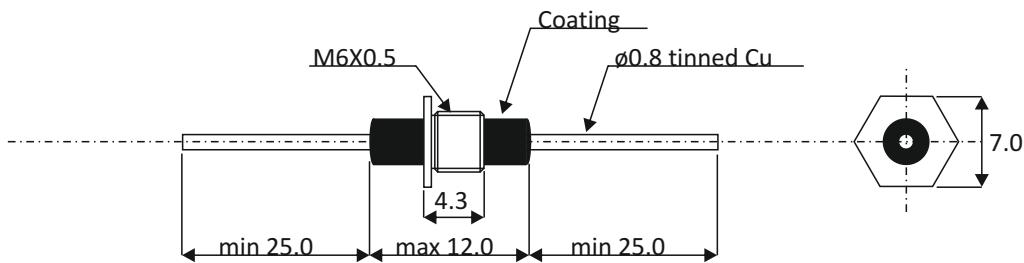

Working voltage.....	350Vdc.
Test voltage.....	1500Vdc 1min./1060Vac 1min.
Feed-through current.....	max 10A
Insulation resistance.....	min 10000 MΩ.
IEC category.....	55/085/56
Capacitance (total).....	900pF+15%
Inductance.....	1000nH-50/+100%
Soldering conditions.....	max 250deg C
Marking.....	None.
Atenuation (typical values).....	1MHz 10MHz 100MHz 1000MHz