


PI-filter

33824002S

Corresponding to F.C. type 138.68XXX SPEC 98030

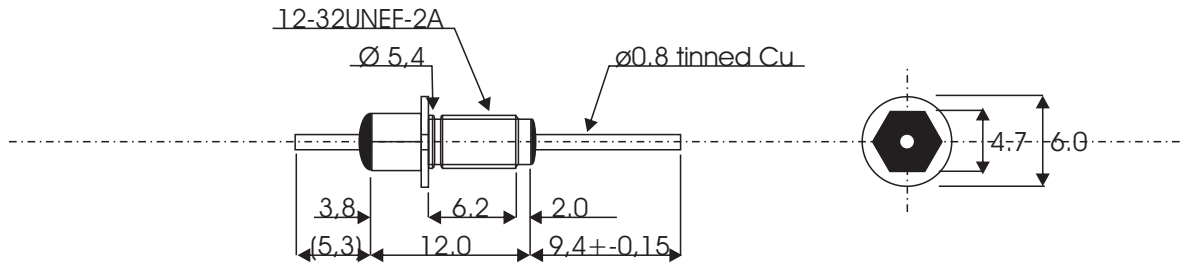

| | |
|-----------------------------------|------------------|
| Working voltage..... | 250Vdc. |
| Test voltage..... | 1000Vdc 1 min. |
| Feed-through current..... | max 10A |
| Insulation resistance..... | min 10^4 MOhm. |
| IEC category..... | 55/125/56 |
| Capacitance | min. 2 x 1.5nF |
| Inductance..... | 1000nH-50/+100% |
| Soldering conditions..... | max 250°C |
| Marking..... | None. |
| | |
| Attenuation (typical values)..... | 1MHz 2dB |
| | 10MHz 25dB |
| | 100MHz 65dB |
| | 1000MHz 80dB |