


# Pi-filter

33824003S

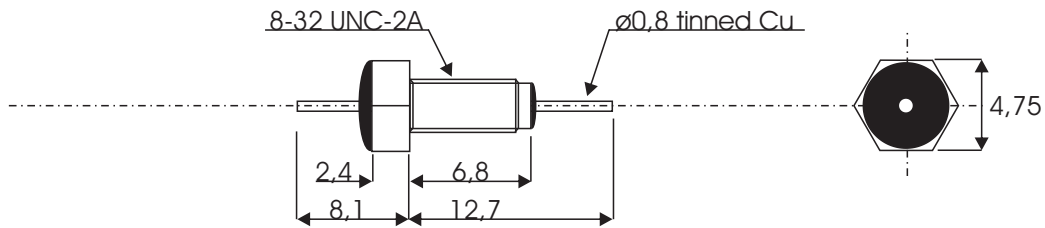

Working voltage.....	100Vdc.
Test voltage.....	250Vdc 1min.
Feed-through current.....	max 10 A.
Insulation resistance.....	min $10^3$ M $\Omega$ m.
IEC category.....	55/125/56
Capacitance.....	min. 2 x 6,0nF
Inductance.....	min. 200nH
Marking.....	None.
To be delivered with nuts and washers.	

Attenuation (typical values).....	1MHz	2dB
	10MHz	30dB
	100MHz	75dB
	1000MHz	80dB