


Pi-filter

33824006S

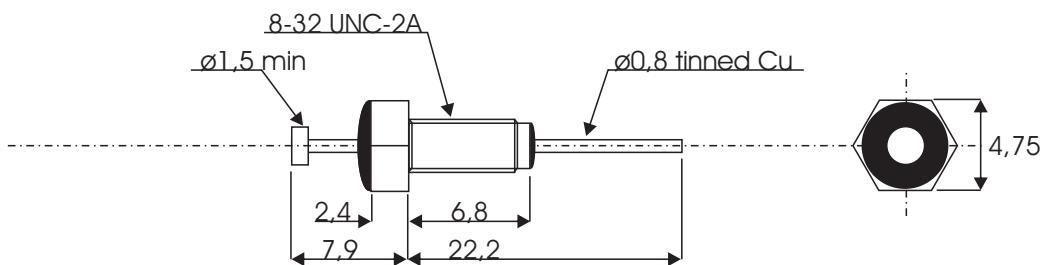

Working voltage.....	200Vdc.
Test voltage.....	500Vdc 1min.
Feed-through current.....	max 10 A.
Insulation resistance.....	min 10^3 MΩ.
IEC category.....	55/125/56
Capacitance.....	min. 2 x 1.0nF
Inductance.....	min. 100nH
Marking.....	None.
Mounting torque.....	0,6Nm

Atenuation (typical values).....	1MHz	2dB
	10MHz	10dB
	100MHz	50dB
	1000MHz	80dB