


# Pi-filter

33824008S

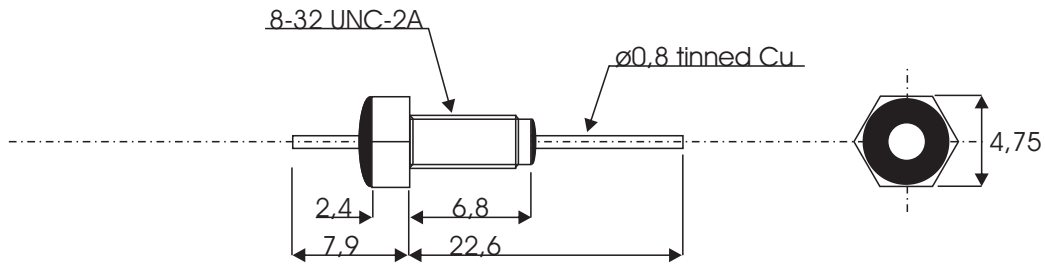

|                            |                           |
|----------------------------|---------------------------|
| Working voltage.....       | 200Vdc.                   |
| Test voltage.....          | 500Vdc 1min.              |
| Feed-through current.....  | max 10 A.                 |
| Insulation resistance..... | min 10 <sup>3</sup> MOhm. |
| IEC category.....          | 55/125/56                 |
| Capacitance.....           | min. 2 x 1,5nF            |
| Inductance.....            | min. 100nH                |
| Marking.....               | None.                     |
| Mounting torque.....       | 0,6Nm                     |

|                                   |         |      |
|-----------------------------------|---------|------|
| Attenuation (typical values)..... | 1MHz    | 2dB  |
|                                   | 10MHz   | 10dB |
|                                   | 100MHz  | 50dB |
|                                   | 1000MHz | 80dB |