


Pi-filter

33824012D

RoHS compliant and Lead free.

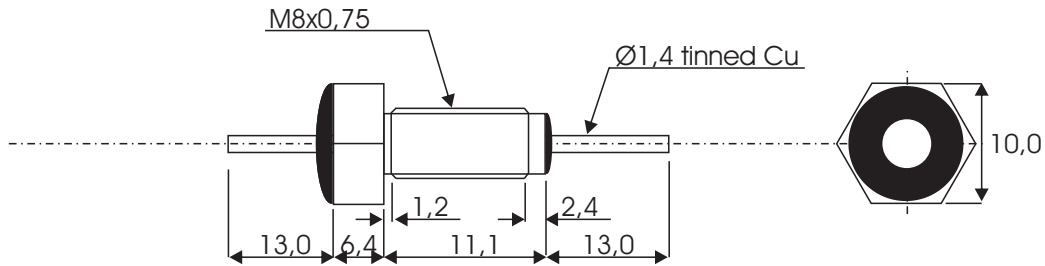

Working voltage.....	500Vdc.
Test voltage.....	1250Vdc 1 min.
Feed-through current.....	max 25 A.
Insulation resistance.....	min 10000 MOhm.
IEC category.....	55/125/56
Capacitance.....	min. 2 x 2,0nF
Inductance.....	min. 200nH
Marking.....	None.
Potting.....	Silicone
Bushing silverplated 3my min.	

Attenuation (typical values).....	10MHz	22dB
	100MHz	65dB
	1000MHz	75dB