


# Pi-filter

33824025D

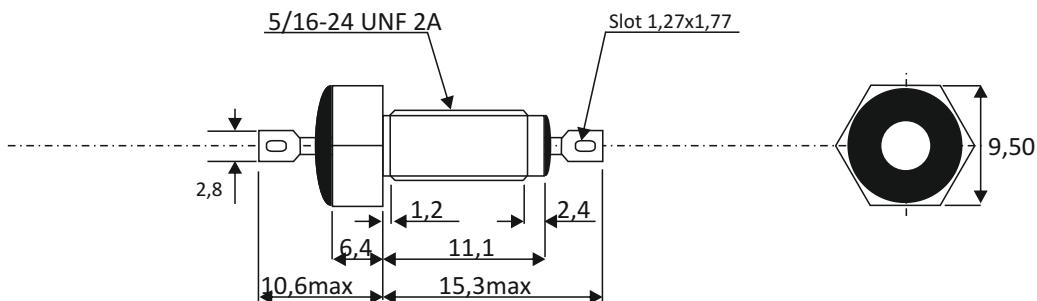

Working voltage	500Vdc.
Test voltage	1250Vdc 1min.
Feed-through current	max 25 A.
Insulation resistance	min 10000 MΩ.
IEC category	55/125/56
Capacitance	min. 2 x 1,5nF
Inductance	min. 200nH
Marking	None.
Potting	Silicone

Atenuation (typical values)	
10MHz	15dB
100MHz	65dB
1000MHz	75dB