


PI-filter

33824034D

Corresponding to FLT/P/5000

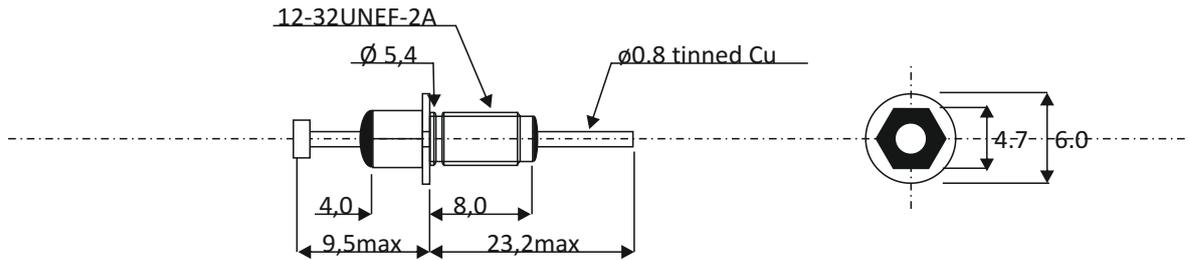

Working voltage	250Vdc.
Test voltage	750Vdc 1min.
Feed-through current	max 10A
Insulation resistance	min 10000 MOhm.
IEC category	55/125/56
Capacitance	min. 2 x 2.5nF
Inductance	1000nH-50/+100%
Soldering conditions	max 250 °C
Marking	None.

Attenuation (typical values)	1MHz	5dB
	10MHz	25dB
	100MHz	70dB
	1000MHz	80dB
	1GHz	80dB