


PI-filter for EX applications according to EN 50 020

33824039D

KRONE MARSHALL DRAWING A4-49235

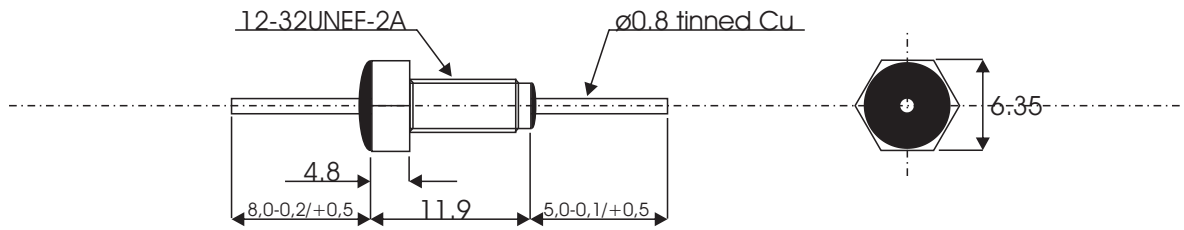

Working voltage.....	250Vdc.
Test voltage.....	1500Vdc 1min./1060Vac 1min.
Feed-through current.....	max 10A
Insulation resistance.....	min 10000 MOhm.
IEC category.....	55/125/56
Capacitance (total).....	4nF-0/+100%
Inductance.....	1000nH-50/+100%
Soldering conditions.....	max 250deg C
Marking.....	None.
Attenuation (typical values).....	1MHz 2dB
	10MHz 25dB
	100MHz 65dB
	1000MHz 80dB