


Pi-filter

33824042D

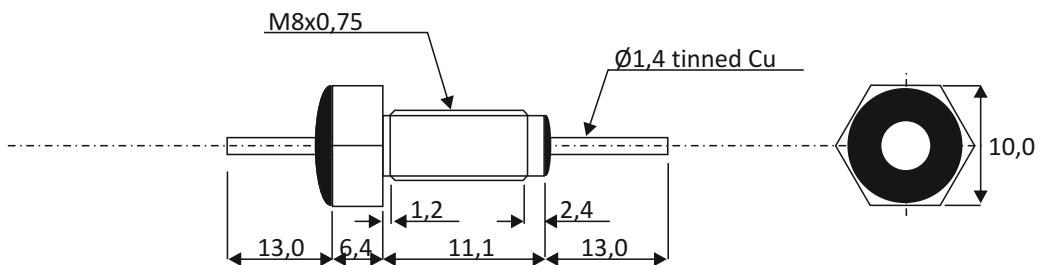

Working voltage.....	1000Vdc.
Test voltage.....	2150Vdc 1min.
Feed-through current.....	max 25 A.
Insulation resistance.....	min 10000 MΩ.
IEC category.....	55/125/56
Capacitance.....	min. 2 x 2,0nF
Inductance.....	min. 200nH
Marking.....	None.
Potting.....	Silicone
Bushing silverplated 3my min.	
Atenuation (typical values).....	
10MHz	22dB
100MHz	65dB
1000MHz	75dB