


Pi-filter

33824057D

ROHS compliant.

Filter resin sealed in both ends (TSE 331k ex).

All dimensions in mm.

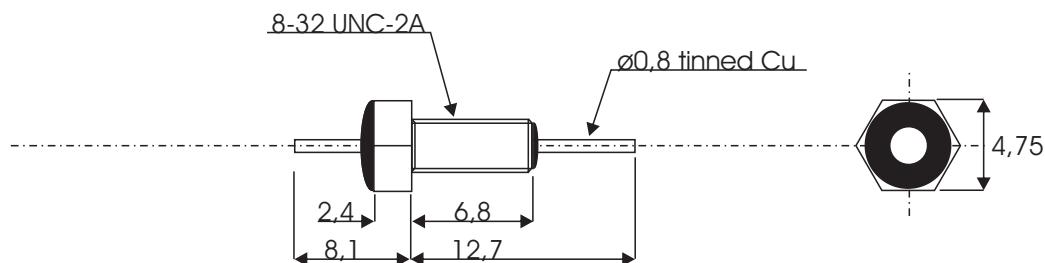

Working voltage.....	100Vdc.
Test voltage.....	250Vdc 1min.
Feed-through current.....	max 10 A.
Insulation resistance.....	min 10000 MΩ.
IEC category.....	55/125/56
Capacitance.....	min. 2 x 14nF
Inductance.....	min. 100nH
Marking.....	None.
Mounting torque.....	0,6Nm

Atenuation (typical values).....	1MHz	10dB
	10MHz	40dB
	100MHz	75dB
	1000MHz	75dB