


Pi-filter

33824058D

ROHS compliant.
Filter resin sealed in both ends (TSE 331k ex).
All dimensions in mm.

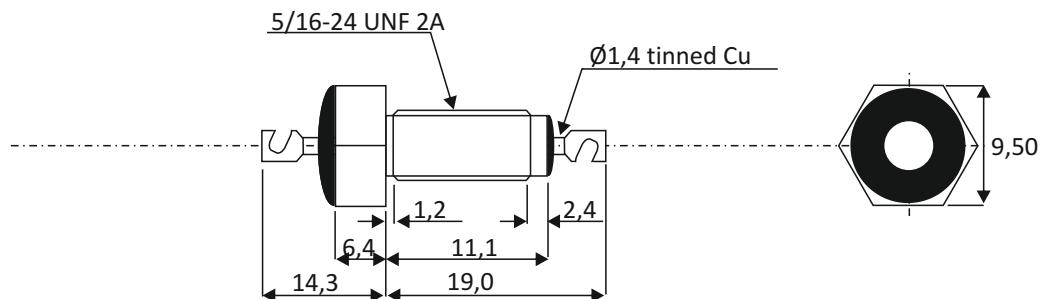

Working voltage.....	500Vdc.
Test voltage.....	1250Vdc 1min.
Feed-through current.....	max 25 A.
Insulation resistance.....	min 10000 MΩ.
IEC category.....	55/125/56
Capacitance.....	min. 2 x 6,0nF
Inductance.....	min. 200nH
Marking.....	None.
Potting.....	Silicone
Bushing silverplated 3my min.	

Atenuation (typical values)	10MHz	22dB
	100MHz	65dB
	1000MHz	75dB