


# PI-filter

## 33824060D

ROHS compliant.  
 Filter resin sealed in both ends (TSE 331k ex).  
 All dimensions in mm.

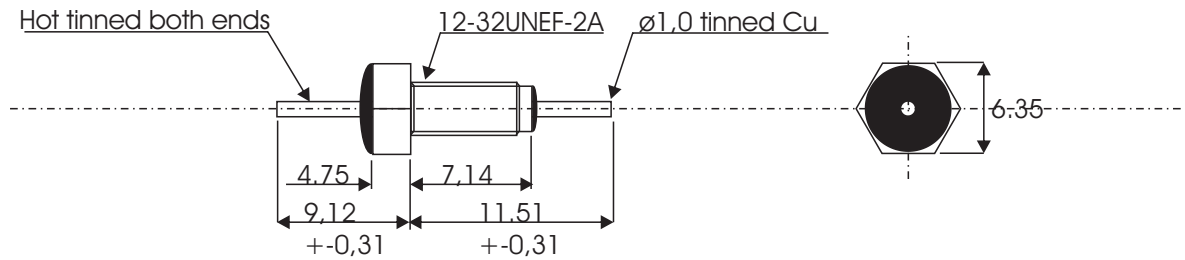

Working voltage.....	500Vdc - 115Vac.
Test voltage.....	1250Vdc 1min.
Feed-through current.....	max 15A
Insulation resistance.....	min 10000 MOhm.
IEC category.....	55/125/56
Capacitance (total).....	3nF-0/+100%
Inductance.....	1000nH-50/+100%
Soldering conditions.....	max 250deg C
Marking.....	None.

Attenuation (typical values).....	1MHz	2dB
	10MHz	20dB
	100MHz	60dB
	1000MHz	70dB
	10000MHz	70dB