


Pi-filter

33824061D

RoHS compliant.

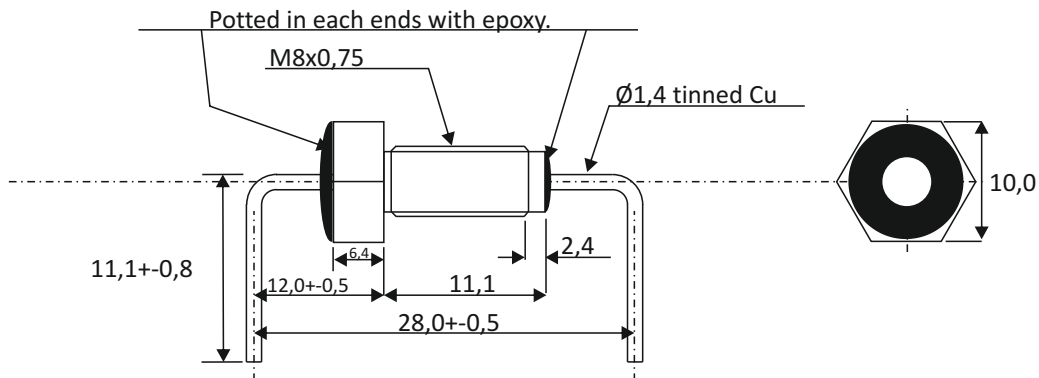

Working voltage	500Vdc.
Test voltage	1250Vdc 1min.
Feed-through current	max 25 A.
Insulation resistance	min 10000 MOhm.
IEC category	55/125/56
Capacitance	min. 2 x 2,0nF
Inductance	min. 200nH
Marking	None.

Bushing silverplated 3my min.

Attenuation (typical values)	10MHz	22dB
	100MHz	65dB
	1000MHz	75dB