


# Pi-filter

33824071D

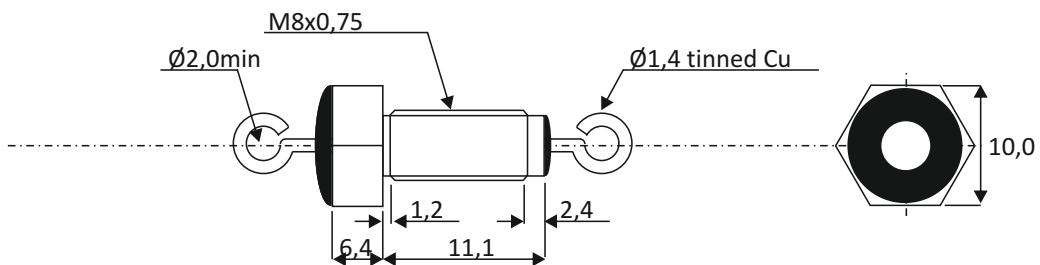

Working voltage	500Vdc.
Test voltage	1250Vdc.
Feed-through current	max 25A.
Insulation resistance	min 10000 MΩ.
IEC category	55/85/56
Capacitance	min 2 x 2,0nF.
Inductance	200nH
Marking	None.
Potting	Silicone/Epoxy
Bushing silverplated 3my min.	
Atenuation (typical values)	
10MHz	22dB
100MHz	65dB
1000MHz	75dB