


Pi-filter

33824075D

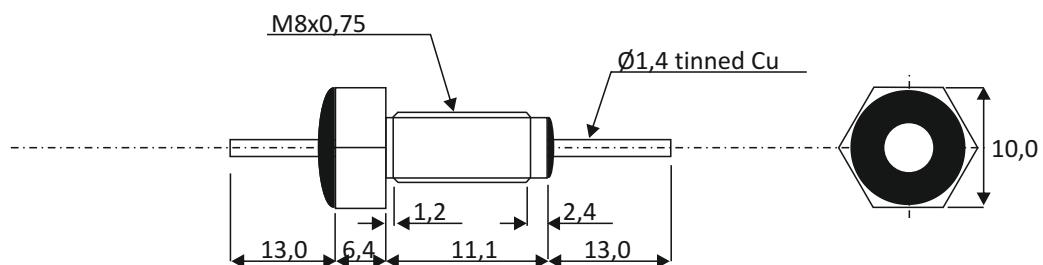

Working voltage.....	500Vdc.
Test voltage.....	1250Vdc 1min.
Feed-through current.....	max 25 A.
Insulation resistance.....	min 10000 MOhm.
IEC category.....	55/125/56
Capacitance.....	2 x 500pF -20/+200%
Inductance.....	min. 200nH
Marking.....	None.
Potting.....	Silicone
Bushing silverplated 3my min.	
Atenuation (typical values).....	10MHz 10dB 100MHz 55dB 1000MHz 75dB