


# Pi-filter

33824076D

Potted with hard epoxy in both ends.

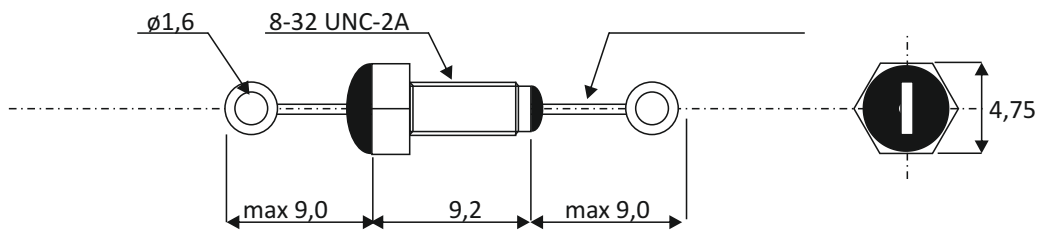

|                                        |                  |
|----------------------------------------|------------------|
| Working voltage                        | 100Vdc.          |
| Test voltage                           | 250Vdc 1min.     |
| Feed-through current                   | max 10 A.        |
| Insulation resistance                  | min 1000 MOhm.   |
| IEC category                           | 55/125/56        |
| Capacitance                            | 2x6,0nF-20/+100% |
| Inductance                             | min. 200nH       |
| Marking                                | None.            |
| To be delivered with nuts and washers. |                  |
| Attenuation (typical values)           |                  |
| 1MHz                                   | 2dB              |
| 10MHz                                  | 30dB             |
| 100MHz                                 | 75dB             |
| 1000MHz                                | 80dB             |