


Pi-filter

33824078D

Potted with hard epoxy in both ends.

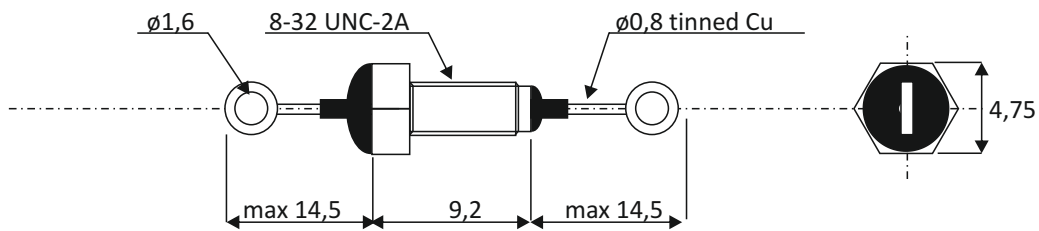

Working voltage	250Vdc.
Test voltage	500Vdc 1min.
Feed-through current	max 10 A.
Insulation resistance	min 1000 MOhm.
IEC category	55/125/56
Capacitance	2x3,0nF-0/+100%
Inductance	min. 200nH
Marking	None.
To be delivered with nuts and washers.	

Attenuation (typical values)	
1MHz	1dB
10MHz	22dB
100MHz	70dB
1000MHz	80dB