


PI-filter

33825005D

Corresponding to F.C. type RPPK/SPPK 3008 Ni

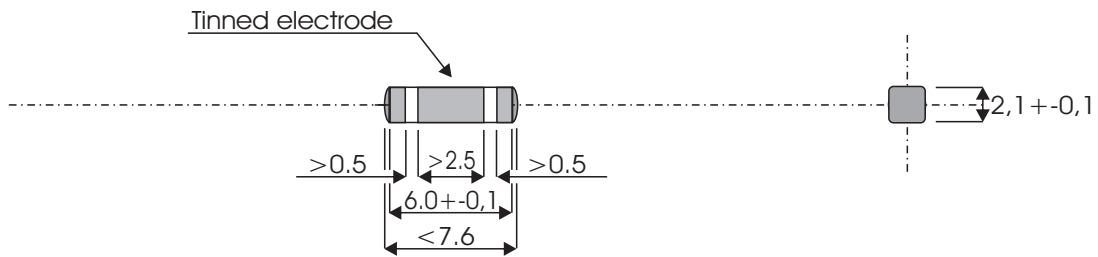

| | |
|-----------------------------------|------------------|
| Working voltage..... | 100Vdc. |
| Test voltage..... | 250Vdc 1min. |
| Feed-through current..... | max 5A |
| Insulation resistance..... | min 10^4 MOhm. |
| IEC category..... | 55/085/56 |
| Capacitance..... | min. 2 x 1.0nF |
| Inductance..... | min. 100nH |
| Marking..... | None. |
| Attenuation (typical values)..... | 1MHz 1dB |
| | 10MHz 10dB |
| | 100MHz 50dB |
| | 1000MHz 80dB |