


Surface mountable PI-filter

33825041D/43D/45D/47D/49D

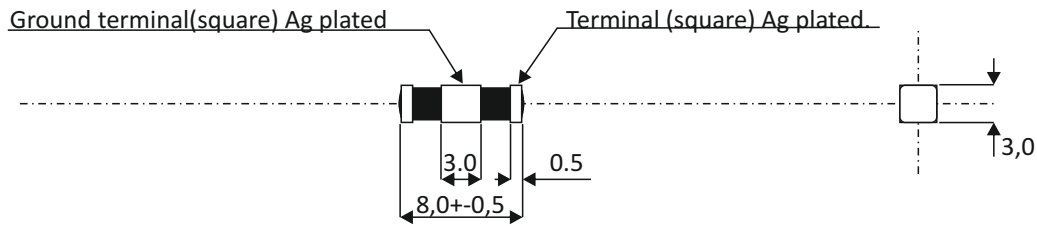

Working voltage	100Vdc.
Test voltage	250Vdc 1min.
Feed-through current	See below
Insulation resistance	min 1000 MOhm.
IEC category	55/085/56
Capacitance	See below
Inductance	200nH-50/+100%
Attenuation	See below
Soldering conditions	max 250 C
Marking	None.

Type numb.	Capacitance pF	Tolerance %	Imax A	Attenuation dB (typical values) 50 Ohm				
				0,1MHz	1MHz	10MHz	100MHz	1GHz
33825041D	100	±20	10	0	0	0	3	18
33825043D	470	±20	10	0	0	0	12	28
33825045D	1.000	-20/+80	10	0	0	4	21	33
33825047D	4.700	-20/+80	10	0	0	10	32	45
33825049D	10.000	-20/+80	10	0	3	20	40	50